




TOLI Carpet Tile

YUTAKA5000PLANK IKEMEN -slim block- <YU-5100V>

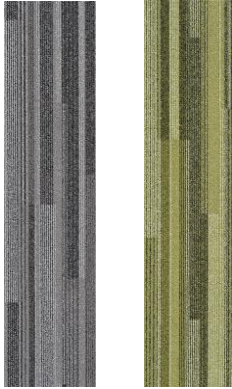

YU5101V YU5164V (custom)

8 standard colors and
5 custom colors available



YU5102V/YU5162V/YU5163V



YU5103V/YU5106V

Technical Specifications

Product Description	Nylon Tufted Carpet Tile
Surface	BCF Nylon100%
Dyeing Method	Piece Dyed
Stain Protection	Stain Release (Antifouling Finished)
Base Fabric	Nonwoven Polyester
Backing	PVC and Glass Fiber
Size	250mm x 1000mm x 7.0mm
Pile Height	H4.5mm / L3.0mm (textured loop pile)
Gauge & Stitches	1/10 th gauge 10.7 stiches/inch
Packing & Net Weight	12pcs/box=3m2/box (16.5kg/box)
Origin	Made in Japan

Performance Testing

test item	test method	result
Electrostatic Propensity	AATCC 134	1.3 kv
Critical Radiant Flux	ASTM E648	Class 2 Average CRF 0.22/cm2 or higher
Smoke Density (flaming)	ASTM E662	Less than 450
Surface Flammability	ASTM D2859	Passes CPSC FF 1-70
Dimensional Stability	ASTM D7570	Less than 0.1% change
Abrasion	ASTM D5252	appearance 3.0 color change 3.5
Tuft Bind	ASTM D1335	8.3 Lbs.
Delamination Strength	ASTM D3936	Construction will not allow for a proper delamination.
Colorfastness to Light	AATCC 16	Rating 5.0 = No Change

Way of Installation



Ashlar



Monolithic

Environmental Certificate

CRI Green Label Plus	GLP9978
ISO14001 Registration	RE0707

Product Notes

Specifications are subject to nominal manufacturing variances.
Material supply and/or manufacturing processes may necessitate changes without notice.
Colors may vary slightly from dye lot to dye lot.
The use of chair pads under roller caster chairs may be required in order to maintain sufficient performance of the product.